




Surface Track

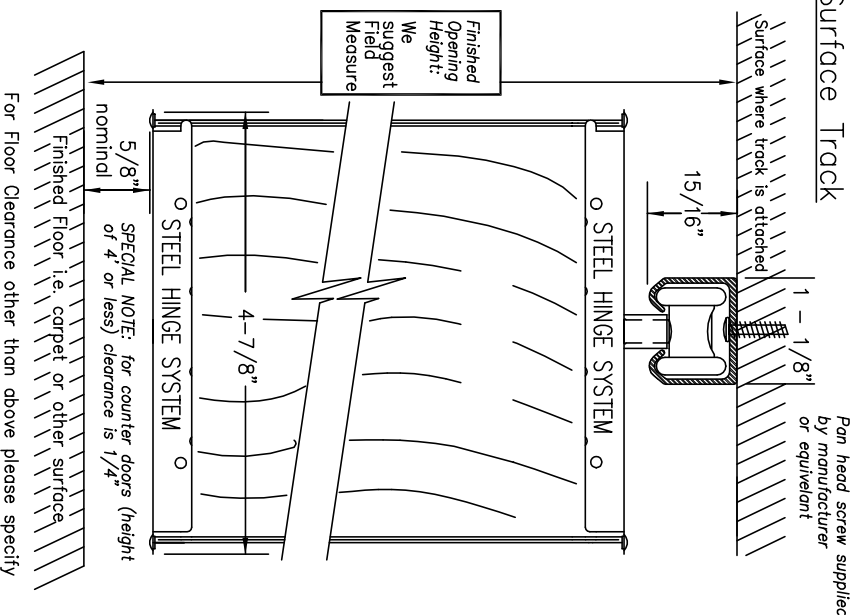


Recessed Track

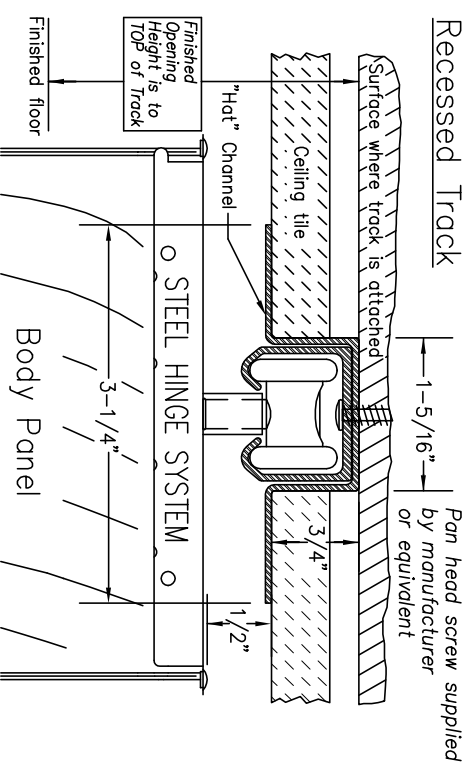


I-Beam Track

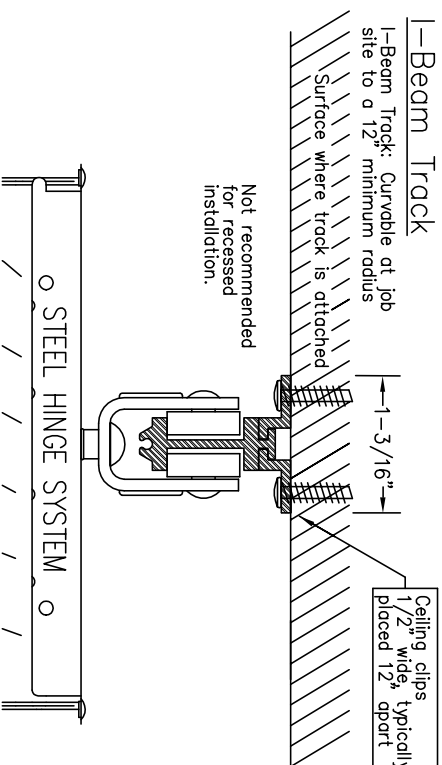


Door Types

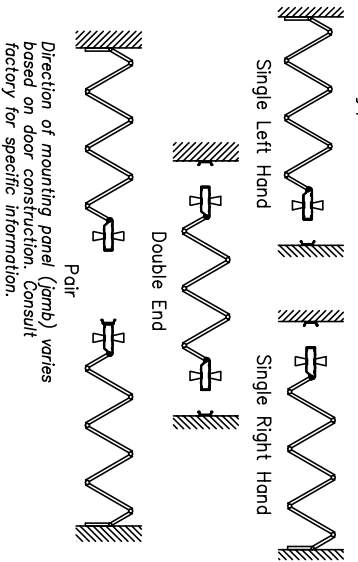


Sliding Jamb Option

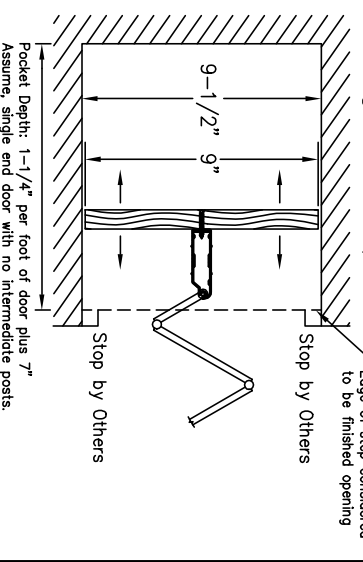


Mounting Panel

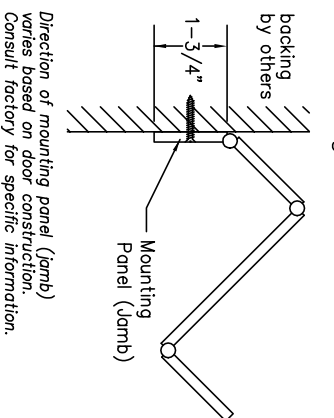


Multiple Meeting Option




Stack Dimensions

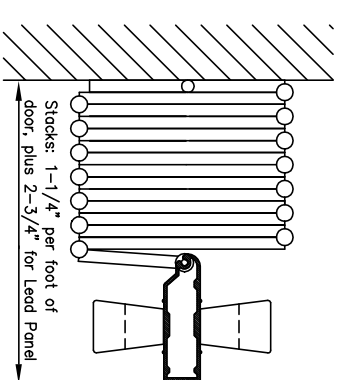


Intermediate Rolling Post

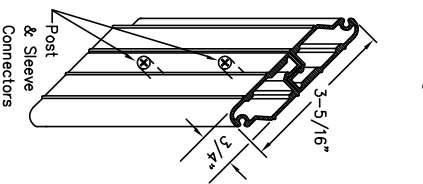


Privacy Latch

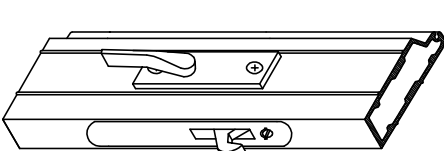


Keylock

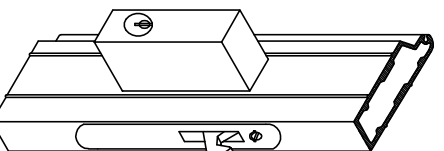

Single Cremone Bolt Keylock

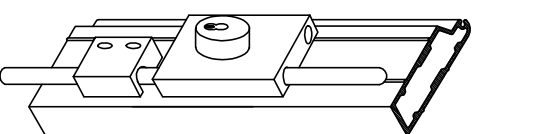

Double Cremone Bolt Keylock

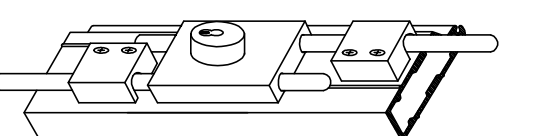

INFORMATION

Width: Custom made to any width

Height: Vinyl lam custom made to 12' -1"

Hardwood veneer custom made to 10' -1"

Panel Connector: Natural hardwood or vinyl-lam on MDF core

Hinge System: Extruded Vinyl: White, Brown or Sand

Wheels: Steel: Dark Bronze or Clear

Track: Ball bearing nylon wheels on steel axles

Aluminum (straight or curvable): Dark bronze or Clear

Aluminum (straight only): White

Recessed Channel/"Hat" Channel: Aluminum: White, Brown or Sand

Lead, Intermediate and Jamb: Coordinated with panel connector

Latch Header: Deadlatch with thumb turn two sides

Door Weight: Average Weight

6'-8" 10lbs. Per lined foot

8'-1" 12lbs. Per lined foot

10'-1" 15lbs. Per lined foot

12'-1" 18lbs. Per lined foot

See Woodfold Accordion Door brochure for additional details

Catch/Lock Options

Magnet with strike plate

Privacy Latch: Deadlatch with thumb turn one side

Springlatch: Springlatch with thumb turn two sides

Keylock 1 Side: Deadlatch with thumb turn one side, keylock one side

Keylock 2 Side: Deadlatch with keylock two sides

Single Cremone: Single cremone bolt with keylock

Double Cremone: Double cremone bolt with keylock

Footbolts: Locking or non locking

Other Keyed Options: Keyed alike, custom keyed, construction core

Contact manufacture for more details

Job Name: _____

Job Location: _____

Supplier: _____

Architects Acceptance

| Qty. | Single End/Double End | Left or Right Stack | Width X Height | Finish/Color | Comments |
|------|-----------------------|---------------------|----------------|--------------|----------|
| | | | | | |
| | | | | | |
| | | | | | |

THESE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

THESE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

Woodfold—Marco Mfg. Inc.
P.O. Box 346 Forest Grove, OR. 97116
http://www.woodfold.com

Phone: 503-357-7181
Fax: 503-357-7185
240 SD 3/00